


Specifications

MR SSI SURR UND

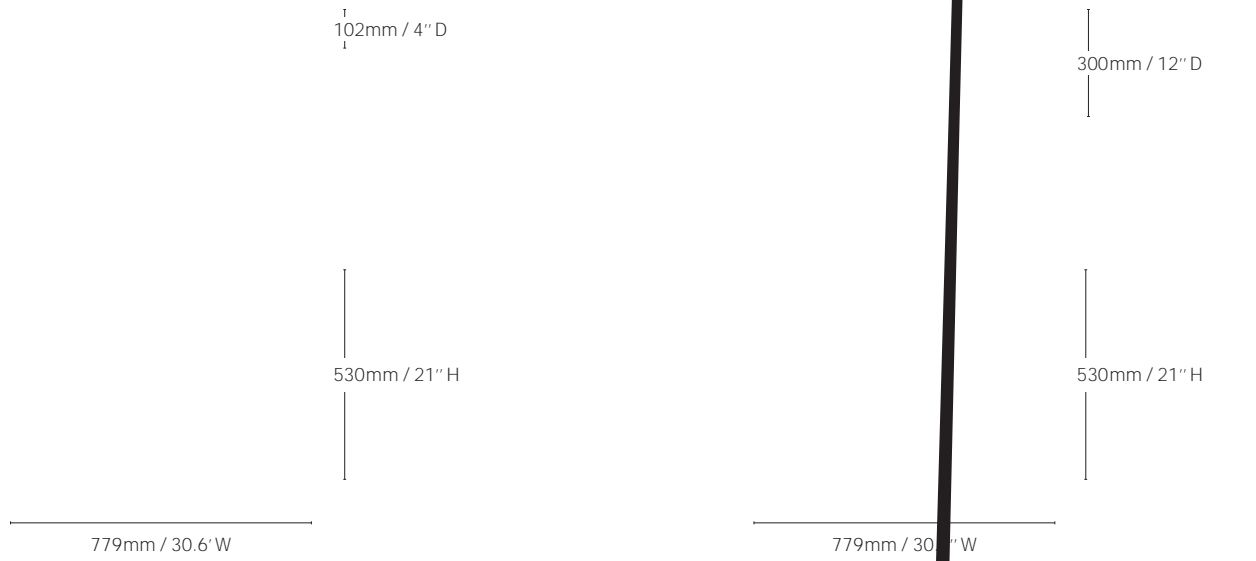

Configurations

W a


W

25–33mm / 1–1.2" Thick
 800mm / 31.5" D
 1400/1500/1600/1800/2000mm
 55.1/59/63/70.8/78.7" W

D H


Fixed height 720 & 1050mm / 28.3 & 41.3"
 Dual stage 620–1220mm / 24.4–48"

T P / Ba - -ba
 2, T, L



F P / Ba - -ba

2, T, L
 1, F, L

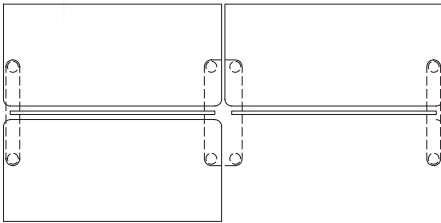

E P / Ba - -ba

2, T, L
 3, F, L

Panels

MR SSI SURR UND

S a Pa

25mm / 1" Thick

800mm / 31.5" H

1400–2000mm / 55.1–78.7" W

Cantilever Bracket

I, a Pa

14/20mm / 0.5/0.8" Thick

600mm / 23.6" H

1400–2000mm / 55.1–78.7" W


L Bracket/Escutcheon Plate

S a Pa with Cantilever Bracket

Reticulation

MR SSI SURR UND

R a b ba

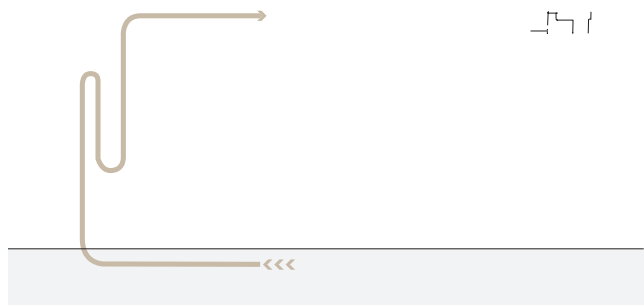

R a b b a ab a

R a b a

R a b a/

N C -

Cab T a C -
180 x 55mm / 7 x 2.1"



Surround Worktop

MR SSI SURR UND

W S a Pa
W a ab a a a ab

